
DATA SHEET



LED FLEX 05.BND **Dimensions** \bigcirc \bigcirc 13 7,5 1000 **Cutting Position Cutting Position** Commission length 05.BND.END EU plug standard to 230VAC \bigcirc \bigcirc \bigcirc \bigcirc 05.BND.2PN The end caps need to be covered in heat shrink tubing 05.BND.ENK **IP65** to achieve an IP65 rating. **Specifications**

Model No.	Power/m	Section Cut	Max. Length	Material Coating	Cable Type
05.BND.230VAC	8W	1m	50m	PVC Flame Retardant	10m H03VVH ₂ -F 2 x 0.75mm ²
Input Voltage	Lumens/m	Diodes/m	Max. Current	Working Temperature	IP Protection
230VAC±10%, 50/60Hz	600lm	60x	4A	-20°C to ~ 50°C	IP65
Lifetime	Light Colour	LED Model	Beam Angle	Welght (without cable)	Dimensions
50,000 hours	6500K±8%	SMD5050	120°	110g / m	13 x 7.5mm

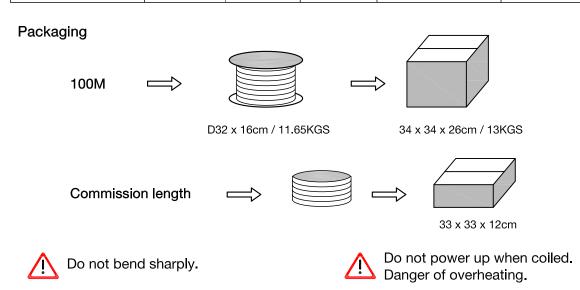

Doc. Nr.	05.BND	Date	03.JUN.2015
Control	E52053F-DJ	·	